

UX-50 UNDERWATER LED FIXTURE

IP68 UNDERWATER LED STAINLESS STEEL FIXTURE

ONE POWERFUL LIGHT, MULTIPLE APPLICATIONS





POOL

UX-50-1023 | FITS SP1023 & 1.5" F.I.P
FOR POOLS AND SPAS

The UX-50 Stainless Steel LED Underwater Fixture features a rugged 316 stainless steel housing with a 10mm thick tempered glass lens over a powerful 10W CREE high lumen output, high efficacy LED designed and engineered for outdoor and underwater use. Threaded flange fits 1.5" F.I.P. for standard 1023 fitting.

FOUNTAINS

UX-50-T | TRIPOD MOUNT FOR WATER
FEATURES FOUNTAINS AND
ARCHITECTURAL LIGHTING

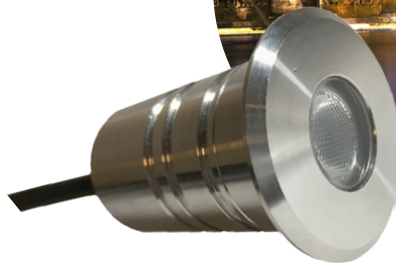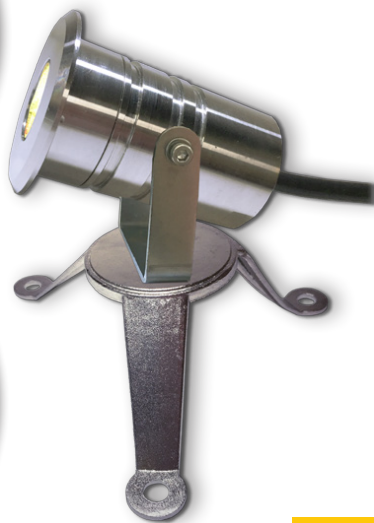

GROTTO & LANDSCAPE

UX-50-P | PVC PIPE MOUNT FOR
GROTTO AND LANDSCAPE
LIGHTING



- ▶ No visible LED Spots
- ▶ IP68
- ▶ 316 Stainless Steel
- ▶ 10mm Tempered Glass Lens
- ▶ 10W CREE LED
- ▶ 4 LED Color Options

IMPACT LIGHTING

PROJECT	DATE
TYPE	QTY

IP 68 UNDERWATER LED STAINLESS STEEL LIGHT FIXTURE


UX-50-1023
Threaded Flange for 1.5" F.I.P.



UX-50-1023

DESCRIPTION:

The UX-50 Stainless Steel LED Underwater Fixture has a variety of uses. With an IP68 rating this line is designed and engineered for outdoor and underwater use. This compact fixture is a powerhouse with a range of 45 to 90+ lumens per Watt.

A rugged 316 stainless steel fixture with a 10mm thick tempered glass lens covers a powerful 10W CREE high lumen output, high efficiency LED. Available in warm white, neutral white, cool white and RGB+W configurations.

The **UX-50-P** is a PVC pipe mount for grotto and landscape lighting.

The **UX-50-T** is a tripod mount with swivel U-bracket perfect for water features, fountains and wet architectural lighting.

The **UX-50-1023** fits SP1023 and 1.5" F.I.P. for pools and spas.

FEATURES:

- No Visible LED Spots
- IP68
- 316 Stainless Steel
- 10mm tempered glass lens
- 10W CREE LED
- 4 LED color option

SPECIFICATIONS

Material	316 Stainless Steel
Cover	Tempered Glass (T=10mm)
IP Rating	IP68
Typical Power Consumption	10W
Input Voltage	12VDC Constant Current 350mA/700mA
Control	DMX512 / ON/ OFF
DMX Channel	4CHS (RGBW) @ DMX512 Control
Light Source	CREE
LED Chip Range	XP-E/XM-L High Lumen Output, High Efficacy
LED Quantity	1PCS
Color/CCT	3000K / 4000K / 6500K / RGBW
CRI	Ra ≥ 80
Lifespan	50,000 hrs.
Beam Angle	10°, 25°, 38°
Product Size	Ø2" x 1.5" x 1.9" h Ø50mm 39mm 49mm
Weight	0.9LBS / 0.41KG
Environment Parameter	Work Temperature -25°~45°
Storage Humidity	0~90°

* 12VDC Requires Constant Current Driver

PHOTOMETRICS



LED	TYPICAL LIGHT EFFICIENCY
3000K	>55LM/W
4000K	>65LM/W
6000K	>90LM/W
RGB	>45LM/W



UX-50-T
Tripod Mount



UX-50-P
PVC Pipe Mount Fixture



UX-50-T
UX-50-P

ORDERING

MODEL	LED	BEAM ANGLE	CORD LENGTH	ACCESSORIES
UX-50-1023 - With Threaded Flange for 1.5" F.I.P.	WW - 3000K NW - 4000K CW - 6500K	10 - 10° 25 - 25° 38 - 38°	15 - 15' 25 - 25' 50 - 50' 75 - 75' 100 - 100'	DMX4 - 4 Channel DMX512 Decoder for RGB+W DE3 - STICK-DE3 DMX Wall Controller 1023W - White Fitting for Pool Light 1023B - Black Fitting for Pool Light
UX-50-T - Tripod Mount	RGB+W - Red/Green /Blue/White			
UX-50-P - PVC Pipe Mount				

IMPACT LIGHTING

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com

www.impactlightinginc.com