

Specifier's Reference
Project
Type
Model No.
Comments or Special Instructions

# ILLUMINATI'S EXTRUSION

## APPLICATION

Cabinet mounting extrusions allow the use of conventional recessed downlight type fittings where it is only possible to surface mount. The extrusion forms a conduit which conceals the fibre tails until they can be exited from the end. We normally supply the harness pre-fitted to the extrusion or we can supply the extrusion on its own.

As detailed above, there are five different sizes of extrusion available, from the largest, CX1, to the smallest CX5.

All our extrusions have sliding front faces to allow fibre and fittings to be mounted easily.

The small CX5 extrusion is unique in that it does not allow for downlights to be fitted to it. Instead it allows for the mounting of fibre tails which shine out through the small holes in the extrusion's surface.


## STANDARD LENGTHS AND COLOURS

Extrusions come as standard in the maximum lengths shown below. They can be cut to size required, or joined to make longer lengths.

Standard colours are detailed below however we can powder coat these to any available RAL colour

## SPECIFICATION

CX1	6 metres	Black anodised
CX2	4 metres	Raw aluminium
CX3	3 metres	Raw aluminium
CX4	3 metres	Raw aluminium
CX5	3 metres	Raw aluminium

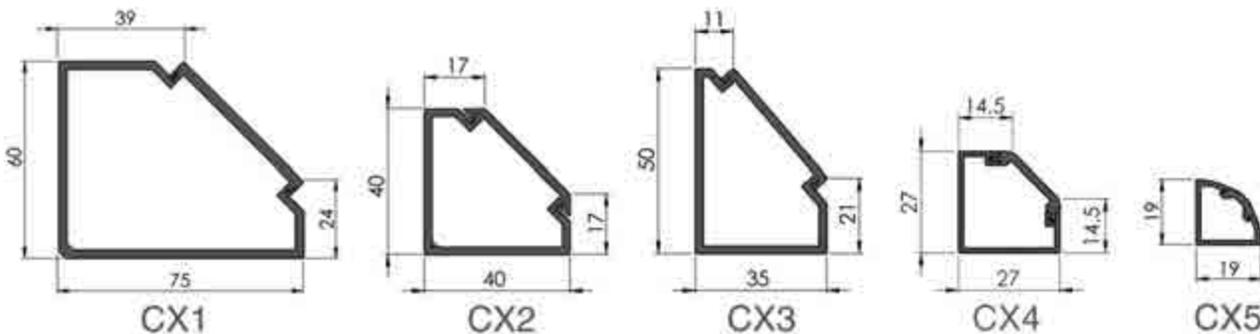

## Ordering Information

ILL-CX1  
ILL-CX4

ILL-CX2  
ILL-CX5

ILL-CX3

